




Product NO.		AD-SA2SA1-RA			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	Gavin	2019/06/27	JIM. KING	

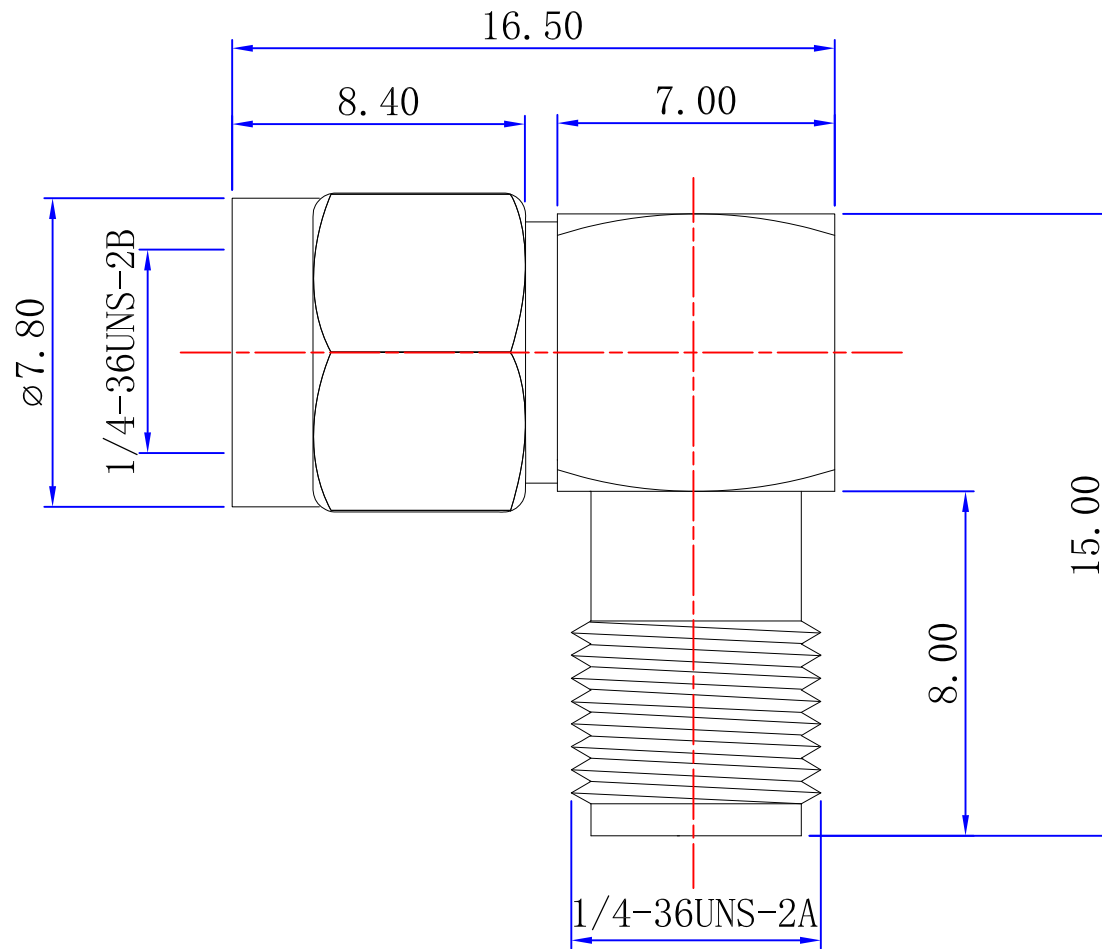

**Specification:**

Impedance: 50 Ohms  
 VSWR: 1.3MAX  
 Frequency range: DC~6G  
 Working Voltage: 260V rms @ sea level  
 Insulation resistance: 5000 Ohms min  
 Temperature range: -55°C TO +155°C  
 Mating Cycles: 500 times  
 Relative temperature: ≤95%(40° C±2° C)  
 Drawings products are in line with ROHS standards.

3	PIN	BRASS	GOLD	1
2	DIELECTRIC	PTFE	NATURE	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED  UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	 radiofrequency engineering		PART DESCRIPTION: SMA PLUG TO SMA JACK CONNECTOR												
	Appd: JIM. KING Check: Draw: Gavin	P/N: AD-SA2SA1-RA <table border="1"> <tr> <td>Date</td> <td>Scale</td> <td>Unit</td> <td>Type</td> <td>Page</td> </tr> <tr> <td>2019.06.27</td> <td>Free</td> <td>MM</td> <td>Z</td> <td>1/1</td> </tr> </table>					Date	Scale	Unit	Type	Page	2019.06.27	Free	MM	Z
Date	Scale	Unit	Type	Page											
2019.06.27	Free	MM	Z	1/1											